

Lenovo ECE-670

Intel® Skylake Core™ i3-6100U/i5-6200U/i7-6500U 处理器，
拥有丰富I/O接口，高度灵活性以及支持快速Mini-PCIe扩展的无风扇系统

产品简介

Intel® Skylake Core™ i3-6100U/i5-6200U/i7-6500U 处理器

双核，TDP 15W，无风扇，多串口，多USB


拥有丰富I/O接口，高度灵活性以及支持快速Mini-PCIe扩展的工业电脑，而且具有适应宽温、强固机构的特性可广泛应用于工业自动化、机器视觉、能源环保、设备检测、金属探测等领域。

产品特点

- 板载Intel® Skylake i3-6100U/i5-6200U/i7-6500U 双核处理器，主频最大可以达到2.5GHz
- 支持单通道DDR4 1866/2133MHz SODIMM内存插槽，内存容量最大可达16GB
- 支持双千兆网口
- 支持VGA/HDMI多扩展显示
- 内置1 x 2.5寸HDD/SSD可扩充支架
- 内置2 x Mini-PCIe及1x M.2支持多种模块扩展
- 宽压9-36V DC-IN，可锁附凤凰端子接口



产品尺寸 (单位: mm)

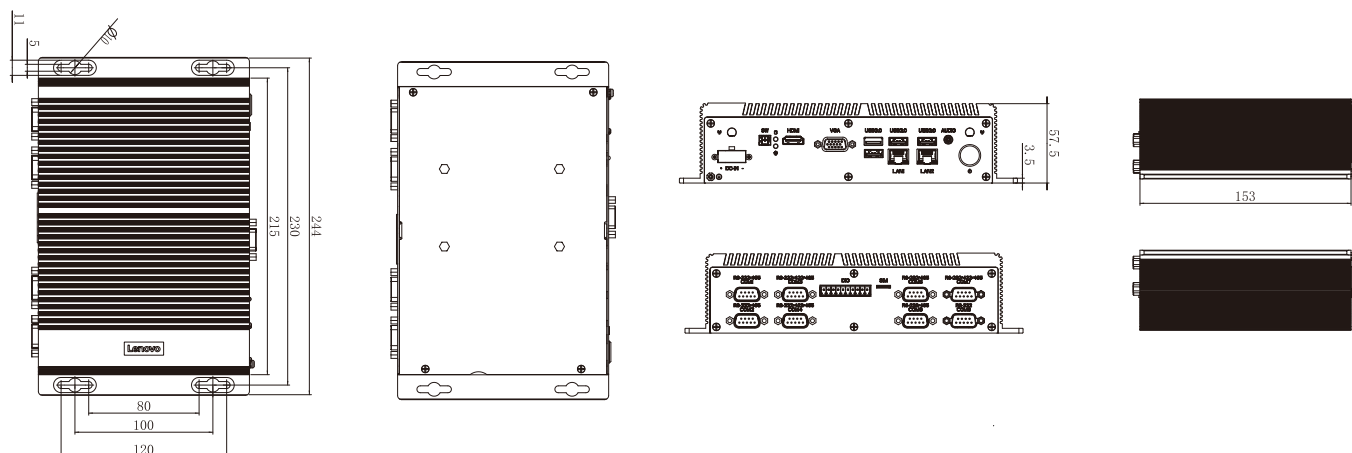

| 产品规格 Specification | |
|----------------------------------|--|
| 系统 System | |
| 处理器 Processor | Intel®6th Gen. Core™ i3-6100U(2.3GHz)/ i5-6200U(2.3GHz)/i7-6500U(2.5GHz) processor |
| 内存 Memory | 1 x DDR4 1866/2133MHz SODIMM, up to 16 GB |
| 存储 Storage | 1 x SATA 3.0 for 2.5" HDD/SSD, 1 x mSATA, 1 x M.2 2242 Slot |
| 图形 Graphics | Intel® HD Graphics 520, dual display |
| 操作系统 OS | Windows 7/8/10, Linux |
| 指示灯 LEDIndicator | 1xPowerLED(GreenforPower-on,BlinkforSleepmode,OffforPower-off) 1xHDDLED(RedblinkforDataedorwrite) |
| 看门狗定时器 WatchdogTimer | Programmable255levelstimerinterval, from1~255sec/min |
| 外部接口 External/O | |
| 网口 Ethernet | 2 x RJ45 Intel® WGI211AT GbE (10/100/1000 Mbps) |
| 音频 Audio | 1 x Audio (Line-out & Mic-in 2 in 1) |
| 显示 Video | 1 x VGA: max resolution up to 1920 x 1200 1 x HDMI: max resolution up to 4096 x 2160 |
| USB | 2 x USB 3.0, 2 x USB 2.0 |
| COM | 6 x COM(2 x RS232/422/485 auto-flow, 4 x RS232/485 optional by jumper) |
| GPIO | 1 x 8bit programmable GPIO |
| 电源开关 Power Button | 1 x M12 power button 1 x Remote power switch |
| 内部接口 Internall/O | |
| 扩展接口 Expansion | 2 x Full-size Mini-PCIe Slot (1 x Mini-PCIe slot on M/B co-lay with mSATA), 1 x M.2 2242 Slot |
| SIMCard | 1xSIMCardSlot |
| 环境 Environment | |
| 操作温度 OperationTemp. | -10°C ~ 60°C (SSD), 0°C ~ 40°C (HDD) |
| 存储温度 StorageTemp. | -40°C~85°C |
| 湿度 RelativeHumidity | 5%~95%,非凝结状态Non-condensing |
| 振动 Vibration | SSD: 5~500Hz, 2Grms operation HDD: 5~500Hz, 1Grms operation |
| 机械冲击 Shock | Operation: 10G@11ms Non-operation: 30G@11ms |
| 电源 Power | |
| 电源输入 PowerInput | 9~36VDC |
| 适配器 Adapter | AC-DC,12V@5A,60W |
| 机构 Mechanical | |
| 外观 Housing | 铝合金AluminumAlloy |
| 尺寸 Dimension | 244x153x57.5mm |
| 重量 Weight | 1.9kg |
| 安装方式 Mounting | 桌面式(Desk-Mount),壁挂式(Wall-Mount) |
| 可选配件 OptionalAccessories | |
| 1 x COM(DB9 Connector) accessory | |